WIBRE

LIGHTING TOOLS


20 21



CONFIGURATION

LIGHT COLORS



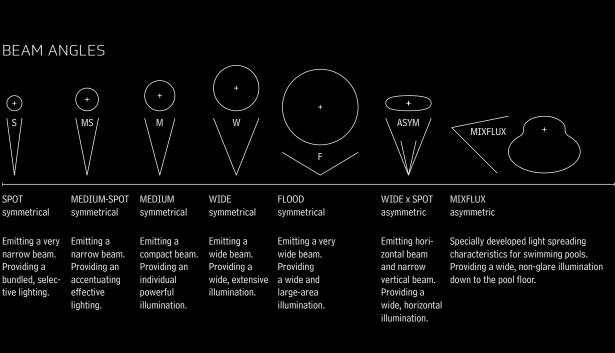

ADDITIONAL PARTS





glass disc, frosted

For a softer distribution of light in the water. Resulting in smooth transition from light to shadow (light loss approx. -15%). Used to achieve a more homogeneous illumination of the water.

anti-glare louver

Proving non-glare, directed light. For use in areas with public access.


POWER SUPPLIES

Detailed technical information on the operating devices can be found in the main catalogue 2019 and at www.wibre.de.


MAIN CATALOGUE

This brochure is solely intended as a supplement to the Main Catalogue 2019, which you can order from us and download at www.wibre.de.

COMPARISON RECESSED SPOTLIGHTS

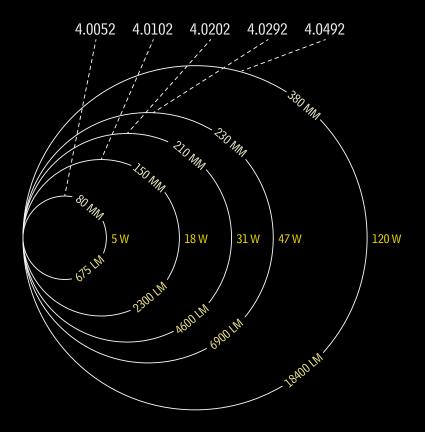

COMPARISON SURFACE MOUNTED SPOTLIGHTS

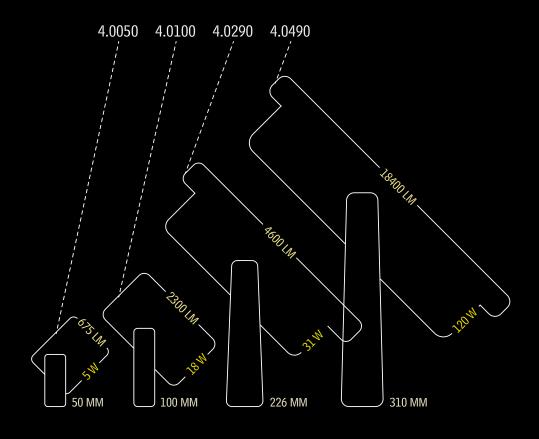



LIGHT UP YOUR POOL AND WATER AREAS

LIGHT UP YOUR FOUNTAINS 20
AND WATERSIDE ARCHITECTURE

RETROFIT YOUR 47

LARC68: HIGHLY RESISTANT 61

ARCHITECTURAL LIGHTING

THIS IS WIBRE 57


LIGHT UP YOUR → POOL AND WATER AREAS

UNBELIEVABLEVARIETY ANDDESIGN POSSIBILITIESWITH A SMALLSPOTLIGHT.



≈ TYPICAL APPLICATIONS

Individual effect lighting symmetrically as wall installation (recommendation: approximately one light per 1-meter pool length) or randomly placed as starry sky in the pool floor. Atmospheric stairs lighting and accentuation of pool sections are likewise possible.

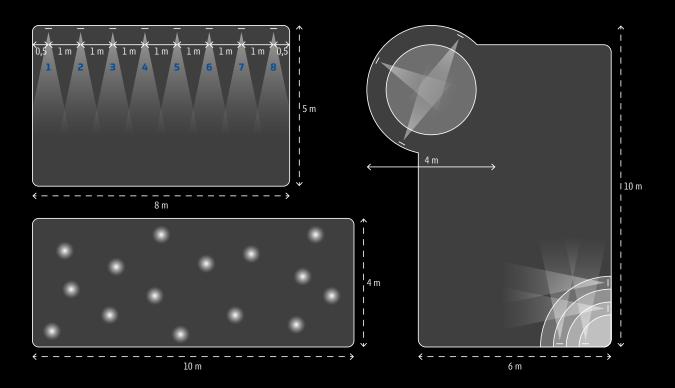

4.0052 RECESSED-SPOTLIGHT

-;- UP TO 675 LUMEN LIGHT INTENSITY PERFECT FOR ACCENTUATION

- · Protection class IP68 up to 5m water depth
- · Entirely made of stainless steel 316Ti 1.4571
- \cdot Round attachment cover, made of stainless steel 316Ti, height 2 mm

•••

- · POW-LED cold white, warm white, neutral white
- · Multichip POW-LED RGB-W
- · Multichip POW-LED dynamic white
- · operating mode: constant current
- · Rotationally symmetric light distribution


...

- · Cable pressure sleeve, stainless steel 316Ti
- · Constant-current power source/RGB-W-controller external
- \cdot Installation housing made of stainless steel 316Ti with 1.5 m cable protection tube
- · Supplied with lamp and 3m of underwater cable




[+] CONFIGURATION

LIGHT COLORS




BEAM ANGLES

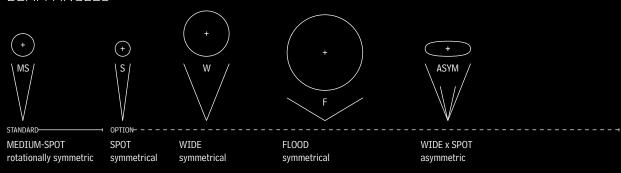




INSTALLATION TYPES

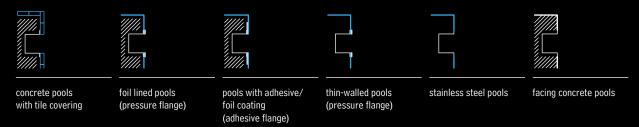

✓ DIMENSIONS



4.0052 RECESSED-SPOTLIGHT



POW-LED INCL.





















RGB-W





MONOCHROME ILLUMINATION

#	4.0052.20.11
COLOR	6.000K cold white
LED	1 POW-LED
LUMEN	675 lm
WATT	total 5 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 2x0,5 qmm
CONNECT	5.0635.65.10 max 1 5.0635.65.20 max 3

#	4.0052.20.12
COLOR	3.000K warm white
LED	1 POW-LED
LUMEN	540 lm
WATT	total 5 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 2x0,5 qmm
CONNECT	5.0635.65.10 max 1 5.0635.65.20 max 3

#	4.0052.20.13
COLOR	4.500K neutral white
LED	1 POW-LED
LUMEN	575 lm
WATT	total 5 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 2x0,5 qmm
CONNECT	5.0635.65.10 max 1 5.0635.65.20 max 3

DYNAMIC ILLUMINATION

#	4.0052.20.41
COLOR	RGB-CW cold white 6000K
LED	1 Multichip POW-LED
LUMEN	cold white: 145 lm
WATT	all on 4 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 3 (12V-DC) or 12 (SELV)

#	4.0052.20.42
COLOR	RGB-WW warm white 3000K
LED	1 Multichip POW-LED
LUMEN	warm white: 125 lm
WATT	all on 4 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 3 (12V-DC) or 12 (SELV)

#	4.0052.20.43
COLOR	RGB-NW neutral white 4500K
LED	1 Multichip POW-LED
LUMEN	neutral white: 135 lm
WATT	all on 4 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 3 (12V-DC) or 12 (SELV)

#	4.0052.20.80
COLOR	3000K-6000K dynamic white
LED	1 Multichip POW-LED
LUMEN	250-290 lm
WATT	all on 4 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 3 (12V-DC) or 12 (SELV)

INSTALLATION HOUSINGS

4.0052.01.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for wall installation, for welding into stainless steel pools and for installation in concrete pools with tile covering (Flange ø 80 mm)

4.0052.02.00

made of V4A stainless steel with 1.5m protective cable tube and M20 plastic terminating connection, for wall installation, for installation in thin-walled pools and foil lined pools (pressure flange ø 84 mm)

4.0052.03.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for wall installation, for installation in pools with adhesive/ foil coating (adhesive flange ø 150 mm)

4.0052.05.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for installation in the ground up to water depth 1,30 m, for welding into stainless steel pools and for installation in concrete pools with tile covering (Housing depth 110 mm, base plate ø 120 mm with fixing/alignment possibility, flange ø 80 mm)

USE IN SALT WATER


This spotlight is also available as a salt-water version. Spotlights for salty water (with a saltwater concentration of up to 3.5 %) are made of special V4A stainless steel 904L (1.4539).


PERFECTION
IN DESIGN AND
FUNCTIONALITY WITHOUT
IFS AND BUTS.




pprox TYPICAL APPLICATIONS

For pools up to 3 or 4 metres wide, choose a single-sided arrangement or offset positioning of the spotlights on both sides. This luminaire allows for individual design - one spotlight is recommended for every 2 metres of pool length. Organically shaped pools show the best effect with an even arrangement.





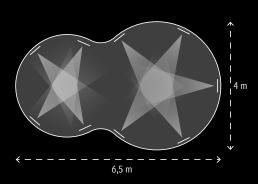

4.0102 RECESSED-SPOTLIGHT

-\'- UP TO 2300 LUMEN LIGHT INTENSITY IDEAL FOR ORGANIC-SHAPED POOLS AND PRIVATE POOLS

- - · Protection class IP68 up to 5m water depth
 - · Entirely made of stainless steel 316Ti 1.4571, epolished
 - \cdot Round and square attachment cover, made of stainless steel 316Ti, height 2 mm

...

- · POW-LED cold white, warm white, neutral white
- · Multichip POW-LED RGB-W
- · Multichip POW-LED dynamic white
- · operating mode: constant current
- · temperature controlled (onboard)
- · surge protection
- · Rotationally symmetric light distribution

...

- · Constant-current power source/RGB-W-controller ordered separately
- · Installation housing made of stainless steel 316Ti with 1.5 m cable protection tube
- · Supplied with 3 m of special underwater cable

13


WIBRE

[+] CONFIGURATION

LIGHT COLORS



BEAM ANGLES

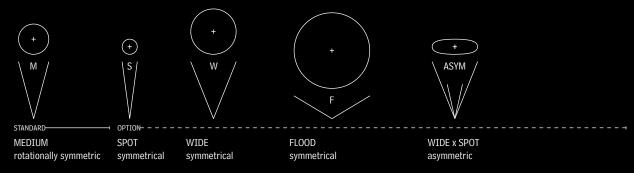


ADDITIONAL PARTS




glass disc, frosted for softer light distribution (light loss approx. -15 %) #50.40102.0002

anti-glare louver black, for POW-LED #35.40100.0001

INSTALLATION TYPES

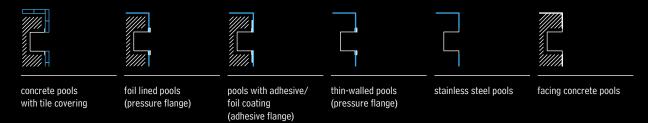

✓ DIMENSIONS

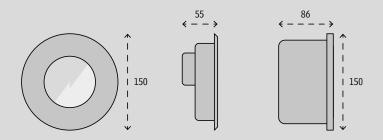

4.0102 RECESSED-SPOTLIGHT



POW-LED INCL.



RGB-W



























MONOCHROME ILLUMINATION

#	4.0102.20.11
COLOR	6000K cold white
LED	4 POW-LED
LUMEN	2300 lm
WATT	total 18 W
POWER	CC 1200mA @12 V-DC
BEAM	30° medium
CABLE	UW, 2x1,5 qmm
CONNECT	5.0630.10.04 max 1 5.0630.00.04 max 1 (without mounting housing)

#	4.0102.20.12
COLOR	3000K warm white
LED	4 POW-LED
LUMEN	1880 lm
WATT	total 18 W
POWER	CC 1200mA @12 V-DC
BEAM	30° medium
CABLE	UW, 2x1,5 qmm
CONNECT	5.0630.10.04 max 1 5.0630.00.04 max 1 (without mounting housing)

#	4.0102.20.13
COLOR	4500K neutral white
LED	4 POW-LED
LUMEN	2010 lm
WATT	total 18 W
POWER	CC 1200mA @12 V-DC
BEAM	30° medium
CABLE	UW, 2x1,5 qmm
CONNECT	5.0630.10.04 max 1 5.0630.00.04 max 1 (without mounting housing)

#	4.0102.20.16
COLOR	royal blue (450 nm)
LED	4 POW-LED
LUMEN	500mW/LED
WATT	total 18 W
POWER	CC 1200mA @12 V-DC
BEAM	30° medium
CABLE	UW, 2x1,5 qmm
CONNECT	5.0630.10.04 max 1 5.0630.00.04 max 1 (without mounting housing)

DYNAMIC ILLUMINATION

#	4.0102.20.41
COLOR	RGB-CW cold white 6000K
LED	4 Multichip POW-LED
LUMEN	cold white: 580 lm
WATT	all on 17 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 1 (12V-DC) or 3 (SELV)

#	4.0102.20.42
COLOR	RGB-WW warm white 3000K
LED	4 Multichip POW-LED
LUMEN	warm white: 500 lm
WATT	all on 17 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 1 (12V-DC) or 3 (SELV)

#	4.0102.20.43
COLOR	RGB-NW neutral white 4500K
LED	4 Multichip POW-LED
LUMEN	neutral white: 540 lm
WATT	all on 17 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 1 (12V-DC) or 3 (SELV)

#	4.0102.20.80
COLOR	3000K-6000K dynamic white
LED	4 Multichip POW-LED
LUMEN	1000-1160 lm
WATT	all on 17 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 1 (12V-DC) or 3 (SELV)

INSTALLATION HOUSINGS

4.0102.01.00

for round and squared cover, made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for welding into stainless steel pools and for installation in concrete pools with tile covering

4.0102.02.00

for round cover, made of V4A stainless steel with 1.5m protective cable tube and M20 plastic terminating connection, for installation in thin-walled pools and foil lined pools (pressure flange ø 155 mm)

4.0102.02.40

for squared cover, made of V4A stainless steel with 1.5m protective cable tube and M20 plastic terminating connection, for installation in thin-walled pools and foil lined pools (pressure flange 155 x 155 mm)

4.0102.03.00

for round and squared cover, made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for installation in pools with adhesive/ foil coating (adhesive flange ø 250 mm)

USE IN SALT WATER


This spotlight is also available as a salt-water version. Spotlights for salty water (with a saltwater concentration of up to 3.5 %) are made of special V4A stainless steel 904L (1.4539).

17 | COMPACT, | EFFECTIVE, | POWERFUL. | THE ALL-ROUNDER | FOR POOL LIGHTING.



≈ TYPICAL APPLICATIONS

For pools in standard sizes up to 5 metres wide, choose a single-sided arrangement or offset positioning of the spotlights on both sides. The number of spotlights depends on the pool length - one spotlight per 2 to 3 metres is recommended.

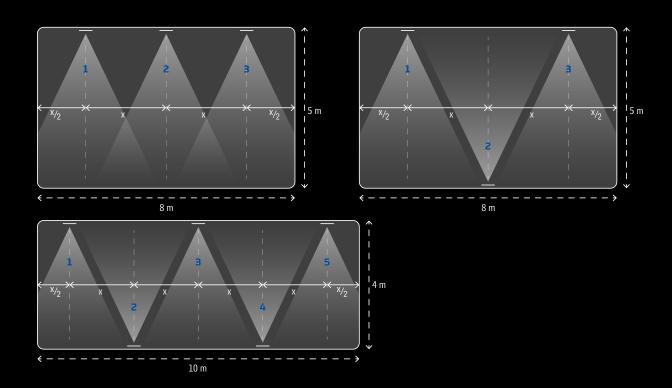

4.0202 SWIMMINGPOOL-LIGHT


- - · Protection class IP68 up to 5m water depth
 - · Entirely made of stainless steel 316Ti 1.4571, epolished
 - \cdot Round attachment cover, made of stainless steel 316Ti, height 2 mm

- · POW-LED cold white, warm white, neutral white
- · POW-LED royal blue
- · Multichip POW-LED RGB-W
- · operating mode: constant current
- · temperature controlled (onboard)
- surge protection
- · rotationally symmetric wide light distribution


- · Constant-current power source/RGB-W-controller ordered separately
- \cdot Installation housing made of stainless steel 316Ti with 1.5 m cable protection tube · Supplied with 5 m of special underwater cable **WIBRE**

[+] CONFIGURATION

LIGHT COLORS



BEAM ANGLES

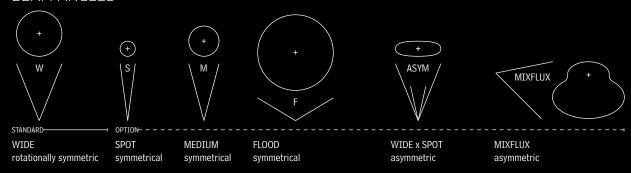


ADDITIONAL PARTS




UPIIUN- - - - - -

glass disc, frosted for softer light distribution (light loss approx. -15 %) #50.40202.0002

INSTALLATION TYPES

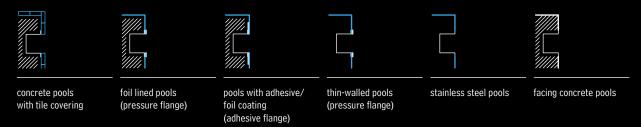

✓ DIMENSIONS

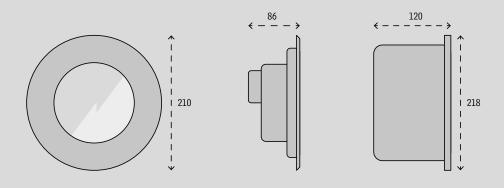

4.0202 SWIMMINGPOOL-LIGHT



POW-LED INCL.

RGB-W

KONSTANT STROM























MONOCHROME ILLUMINATION

#	4.0202.00.11
COLOR	6.000K cold white
LED	8 POW-LED
LUMEN	4600 lm
WATT	total 31 W
POWER	CC 2400mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.10.08 max 1

#	4.0202.00.12
COLOR	3.000K warm white
LED	8 POW-LED
LUMEN	3760 lm
WATT	total 31 W
POWER	CC 2400mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.10.08 max 1

#	4.0202.00.13
COLOR	4.500K neutral white
LED	8 POW-LED
LUMEN	4024 lm
WATT	total 31 W
POWER	CC 2400mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.10.08 max 1

#	4.0202.00.16
COLOR	royal blue (450 nm)
LED	8 POW-LED
LUMEN	500mW/LED
WATT	total 33 W
POWER	CC 2400mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.10.08 max 1

DYNAMIC ILLUMINATION

#	4.0202.00.41
COLOR	RGB-CW cold white 6000K
LED	8 Multichip POW-LED
LUMEN	cold white: 1160 lm
WATT	all on 50 W
POWER	CC 700mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 10x0,5 qmm
CONNECT	5.0670.19.52 max 1

#	4.0202.00.42
COLOR	RGB-WW warm white 3000K
LED	8 Multichip POW-LED
LUMEN	warm white: 1000 lm
WATT	all on 50 W
POWER	CC 700mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 10x0,5 qmm
CONNECT	5.0670.19.52 max 1

#	4.0202.00.43
COLOR	RGB-NW neutral white 4500K
LED	8 Multichip POW-LED
LUMEN	neutral white: 1080 lm
WATT	all on 50 W
POWER	CC 700mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 10x0,5 qmm
CONNECT	5.0670.19.52 max 1

#	4.0202.00.80
COLOR	3000K-6000K dynamic white
LED	8 Multichip POW-LED
LUMEN	2000-2320 lm
WATT	all on 50 W
POWER	CC 700mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 10x0,5 qmm
CONNECT	5.0670.19.52 max 1

INSTALLATION HOUSINGS

4.0199.01.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for installation in concrete pools with tile covering

4.0199.02.00

made of V4A stainless steel with 1.5m protective cable tube and M20 plastic terminating connection, for installation in thin-walled pools and foil lined pools (pressure flange ø 218 mm)

4.0199.03.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for installation in pools with adhesive/foil coating (adhesive flange ø 360 mm)

4.0199.04.00


made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for facing concrete and for welding into stainless steel pools

77 | THE BESTSELLER FOR GENERATIONS. THE ULTIMATE IN PERFORMANCE AND QUALITY.



pprox TYPICAL APPLICATIONS

Starting from a pool width of 8 metres, choose an opposite arrangement of the spotlights, with a distance of approximately 3 metres between each. This determines the number of spotlights per pool length. The positioning can be parallel or offset. For narrower pools, a one-sided arrangement is practical.

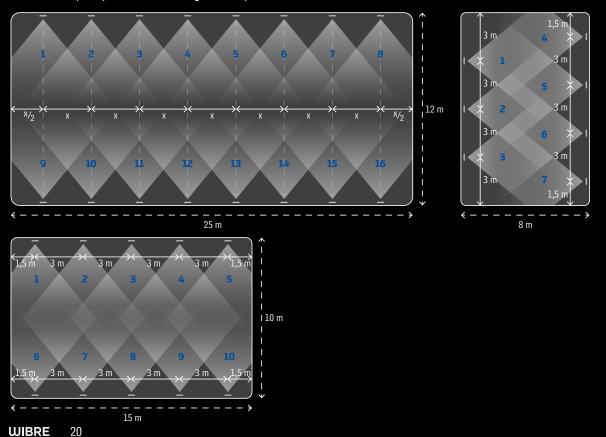

4.0292 SWIMMINGPOOL-LIGHT

- · Protection class IP68 up to 5m water depth
- · Entirely made of stainless steel 316Ti 1.4571, epolished
- · Round attachment cover, made of stainless steel 316Ti, height 2 mm

...


- · POW-LED cold white, warm white, neutral white
- · POW-LED royal blue
- · Multichip POW-LED RGB-W
- · operating mode: constant current
- · temperature controlled (onboard)
- · surge protection
- $\cdot \ \ light \ distribution \ especially \ for \ swimming \ pool \ lighting \ "asymmetric \ Mixflux"$

...




[+] CONFIGURATION

LIGHT COLORS



BEAM ANGLES

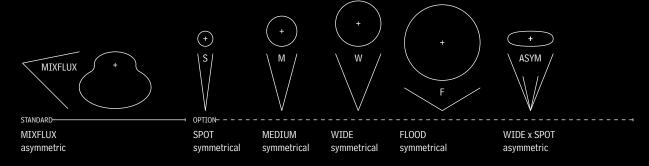


ADDITIONAL PARTS




OPTION-

glass disc, frosted for softer light distribution (light loss approx. -15 %) #50.40292.0004

INSTALLATION TYPES

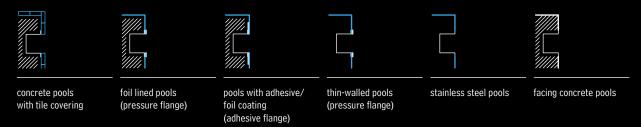

✓ DIMENSIONS

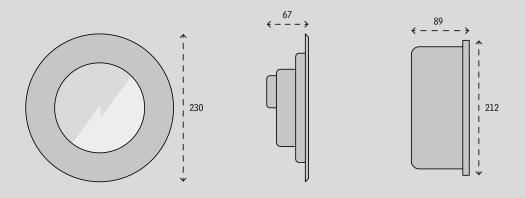

4.0292 SWIMMINGPOOL-LIGHT



STAINLESS STEEL V4A 1,4571

POW-LED INCL.



RGB-W

























MONOCHROME ILLUMINATION

#	4.0292.00.11
COLOR	6000K cold white
LED	12 POW-LED
LUMEN	6900 lm
WATT	total 47 W
POWER	CC 3600mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.01.12 max 1 5.0630.03.12 max 3

#	4.0292.00.12
COLOR	3000K warm white
LED	12 POW-LED
LUMEN	5640 lm
WATT	total 47 W
POWER	CC 3600mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.01.12 max 1 5.0630.03.12 max 3

4.0292.00.13
4500K neutral white
12 POW-LED
6036 lm
total 47 W
CC 3600mA @12 V-DC
asymmetrisch Mixflux
UW, 2x2,5 qmm
5.0630.01.12 max 1 5.0630.03.12 max 3

#	4.0292.00.16
COLOR	royal blue (450 nm)
LED	48 POW-LED
LUMEN	500mW/LED
WATT	total 49,5 W
POWER	CC 3600mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.01.12 max 1 5.0630.03.12 max 3

DYNAMIC ILLUMINATION

#	4.0292.00.41
COLOR	RGB-CW cold white 6000K
LED	12 Multichip POW-LED
LUMEN	cold white: 2100 lm
WATT	all on 75 W
POWER	CC 1400mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, $1x4,0 + 4x1,0 + 2x0,25$ qmm
CONNECT	5.0630.09.52 max 1

#	4.0292.00.42
COLOR	RGB-WW warm white 3000K
LED	12 Multichip POW-LED
LUMEN	warm white: 1800 lm
WATT	all on 75 W
POWER	CC 1400mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	$\begin{array}{l} \text{UW, 1x4,0} + 4\text{x1,0} + 2\text{x0,25} \\ \text{qmm} \end{array}$
CONNECT	5.0630.09.52 max 1

#	4.0292.00.43
COLOR	RGB-NW neutral white 4500K
LED	12 Multichip POW-LED
LUMEN	neutral white: 1920 lm
WATT	all on 75 W
POWER	CC 1400mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 1x4,0 + 4x1,0 + 2x0,25 qmm
CONNECT	5.0630.09.52 max 1

INSTALLATION HOUSINGS

4.0292.01.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for welding into stainless steel pools and for installation in concrete pools with tile covering

4.0292.02.00

made of V4A stainless steel with 1.5m protective cable tube and M20 plastic terminating connection, for installation in thin-walled pools and foil lined pools (pressure flange ø 244 mm)

4.0292.03.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for installation in pools with adhesive/foil coating (adhesive flange ø 350 mm)

USE IN SALT WATER


This spotlight is also available as a salt-water version. Spotlights for salty water (with a saltwater concentration of up to 3.5 %) are made of special V4A stainless steel 904L (1.4539).

PEAK PERFORMANCE FOR HIGH PERFORMANCES.
A POWER-PACK AS SIMPLE AS
NEVER BEFORE.



\lessapprox TYPICAL APPLICATIONS

With a distance of about 4 metres each, you choose an opposite parallel arrangement to illuminate competition pools optimally - 12 spotlights per pool length are recommended here. For sports pools with a size of 25×12 metres, 5 to 6 spotlights per side are intended. The positioning can also be done in a diagonally offset way.

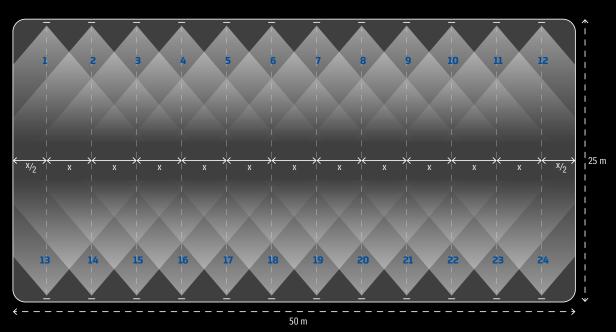


4.0492 SWIMMINGPOOL-LIGHT

-\- UP TO 18600 LUMEN LIGHT INTENSITY IDEAL FOR COMPETITION AND SPORT POOLS




[+] CONFIGURATION

LIGHT COLORS



BEAM ANGLES

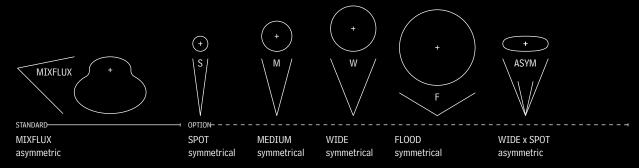


ADDITIONAL PARTS




glass disc, frosted

glass disc, frosted for softer light distribution (light loss approx. -15 %)

INSTALLATION TYPES

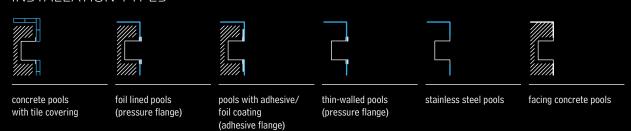

✓ DIMENSIONS

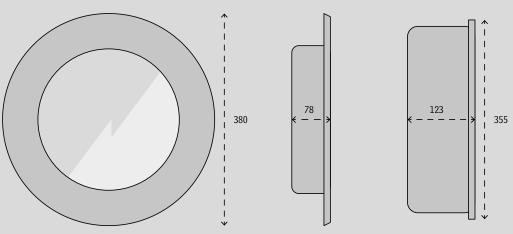

WIBRE

4.0492 SWIMMINGPOOL-LIGHT





POW-LED INCL.

























CONSTANT VOLTAGE





MONOCHROME ILLUMINATION

#	4.0492.00.11
COLOR	6000K cold white
LED	32 POW-LED
LUMEN	18600 lm
WATT	total 120 W
POWER	CV 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.10.32 max 1

#	4.0492.00.12
COLOR	3000K warm white
LED	32 POW-LED
LUMEN	15040 lm
WATT	total 120 W
POWER	CV 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.10.32 max 1

#	4.0492.00.13
COLOR	4500K neutral white
LED	32 POW-LED
LUMEN	16080 lm
WATT	total 120 W
POWER	CV 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.10.32 max 1

DYNAMIC ILLUMINATION

#	4.0492.00.41
COLOR	RGB-CW cold white 6000K
LED	32 Multichip POW-LED
LUMEN	cold white: 4640 lm
WATT	all on 140 W
POWER	CC 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 41x0,5 qmm
CONNECT	5.0670.49.52 max 1

4.0492.00.42
RGB-WW warm white 3000k
32 Multichip POW-LED
warm white: 3760 lm
all on 140 W
CC 12 V-DC
asymmetrisch Mixflux
UW, 41x0,5 qmm
5.0670.49.52 max 1

#	4.0492.00.43
COLOR	RGB-NW neutral white 4500K
LED	32 Multichip POW-LED
LUMEN	neutral white: 4020 lm
WATT	all on 140 W
POWER	CC 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 41x0,5 qmm
CONNECT	5.0670.49.52 max 1

INSTALLATION HOUSINGS

4.0492.01.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for welding into stainless steel pools and for installation in concrete pools with tile covering

4.0492.02.00

made of V4A stainless steel with 1.5m protective cable tube and M20 plastic terminating connection, for installation in thin-walled pools and foil lined pools (pressure flange mm)

4.0492.03.00

made of V4A stainless steel with 1.5 m protective cable tube and M20 plastic terminating connection, for installation in pools with adhesive/foil coating (adhesive flange mm)

← LIGHT UP YOUR POOL AND WATER AREAS


LIGHT UP YOUR FOUNTAINS AND WATERSIDE ARCHITECTURE 17 LIGHT TO THE POINT. ELEGANT AND HARDLY BIGGER THAN A TENNIS BALL.




\lessapprox TYPICAL APPLICATIONS

Suitable for fountains up to a water height of 2 metres. Variable object lighting outside the water is also possible, for example in gardens. Flat water basins and trick fountains can be individually illuminated by the infinitely variable swivel spotlight.







4.0050 SURFACE-MOUNTED SPOTLIGHT

-;- UP TO 675 LUMEN LIGHT INTENSITY PERFECT FOR FOUNTAINS AND WATER ATTRACTIONS


- \equiv
- · Protection class IP68 up to 3m water depth
- · Entirely made of stainless steel 316Ti 1.4571
- \cdot Mounting foot adjustable through 90°

...

- \cdot POW-LED cold white, warm white, neutral white
- · Multichip POW-LED RGB-W
- · Multichip POW-LED dynamic white
- · operating mode: constant current
- · Rotationally symmetric light distribution

...


- · Cable pressure sleeve, stainless steel 316Ti
- · Constant-current power source/RGB controller external
- · Supplied with lamp and 3m of underwater cable

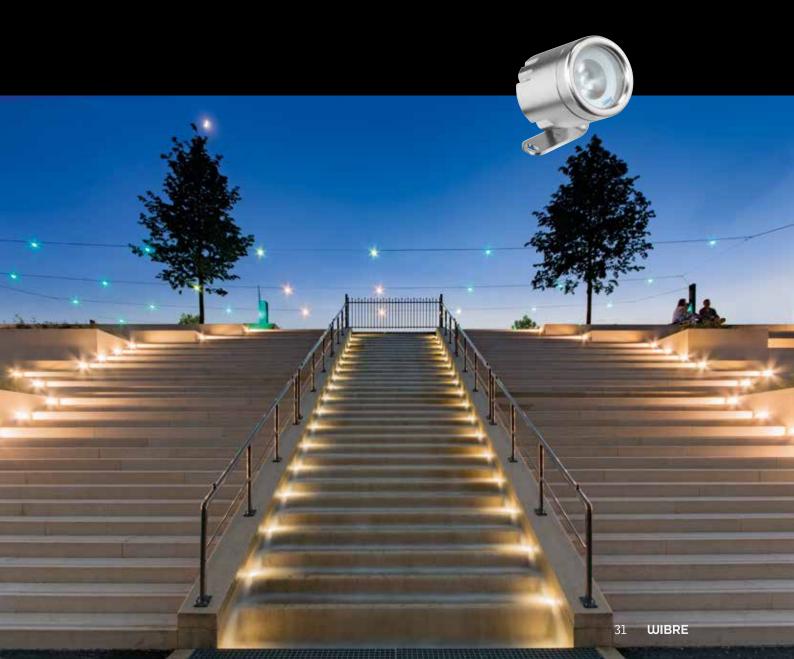


4.0050 SURFACE-MOUNTED SPOTLIGHT

[+] CONFIGURATION


LIGHT COLORS




BEAM ANGLES

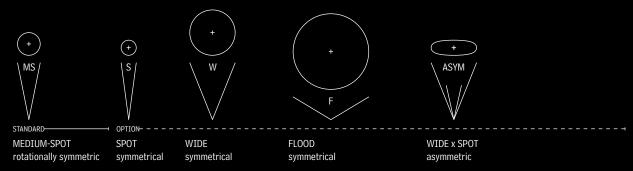

ADDITIONAL PARTS

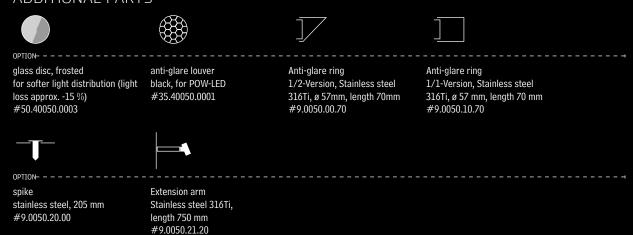

✓ DIMENSIONS



4.0050 SURFACE-MOUNTED SPOTLIGHT





ELECTRO POLISHED

































MONOCHROME ILLUMINATION



#	4.0050.30.11
COLOR	6.000K cold white
LED	1 POW-LED
LUMEN	675 lm
WATT	total 5 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 2x0,5 qmm
CONNECT	5.0635.65.10 max 1 5.0635.65.20 max 3

#	4.0050.30.12
COLOR	3.000K warm white
LED	1 POW-LED
LUMEN	540 lm
WATT	total 5 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 2x0,5 qmm
CONNECT	5.0635.65.10 max 1 5.0635.65.20 max 3

#	4.0050.30.13
#	4.0050.30.13
COLOR	4.500K neutral white
LED	1 POW-LED
LUMEN	575 lm
WATT	total 5 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 2x0,5 qmm
CONNECT	5.0635.65.10 max 1 5.0635.65.20 max 3

DYNAMIC ILLUMINATION



#	4.0050.30.41
COLOR	RGB-CW cold white 6000K
LED	1 Multichip POW-LED
LUMEN	cold white: 145 lm
WATT	all on 4 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 3 (12V-DC) or 12 (SELV)

#	4.0050.30.42
COLOR	RGB-WW warm white 3000K
LED	1 Multichip POW-LED
LUMEN	warm white: 125 lm
WATT	all on 4 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 3 (12V-DC) or 12 (SELV)

#	4.0050.30.43
COLOR	RGB-NW neutral white 4500K
LED	1 Multichip POW-LED
LUMEN	neutral white: 135 lm
WATT	all on 4 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 3 (12V-DC) or 12 (SELV)


#	4.0050.30.80
COLOR	3000K-6000K dynamic white
LED	1 Multichip POW-LED
LUMEN	250-290 lm
WATT	all on 4 W
POWER	CC 350mA @12 V-DC
BEAM	25° medium-spot
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 3 (12V-DC) or 12 (SELV)

MADE TO STAND OUT.
IN DESIGN,
IN DYNAMISM,
IN PERFORMANCE.



pprox TYPICAL APPLICATIONS

For fountains up to 5 metres high, the weak version of the spotlight is suitable. It can also be used for individual object lighting outside of the water. With the more powerful version you can illuminate fountains up to a height of 10 metres.

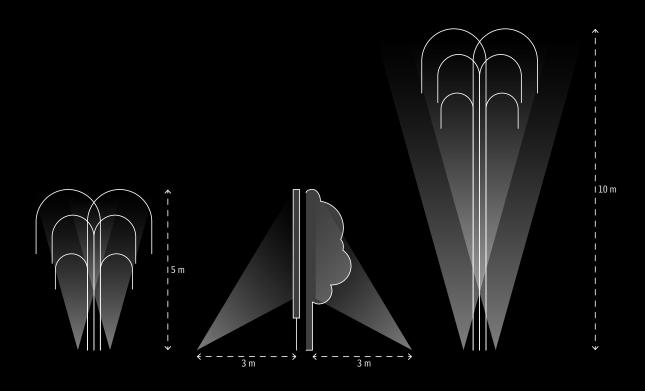

4.0100 SURFACE-MOUNTED SPOTLIGHT

-;- UP TO 2300 LUMEN LIGHT INTENSITY PERFECT FOR FOUNTAINS AND WATER ATTRACTIONS

- · Protection class IP68 up to 3m water depth
- · Entirely made of stainless steel 316Ti 1.4571
- · Mounting foot adjustable through 90°

...

- · POW-LED cold white, warm white, neutral white
- · Multichip POW-LED RGB-W
- · Multichip POW-LED dynamic white
- · operating mode: constant current
- temperature controlled (onboard)
- · surge protection
- · Rotationally symmetric light distribution

...

- · Cable pressure sleeve, stainless steel 316Ti
- Constant-current power source/RGB controller external
 Supplied with lamp and 3 m of underwater cable

WIBRE


4.0100 SURFACE-MOUNTED SPOTLIGHT

[+] CONFIGURATION


LIGHT COLORS




BEAM ANGLES

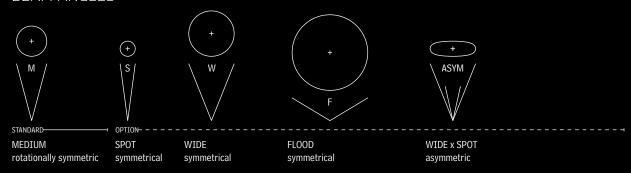

ADDITIONAL PARTS

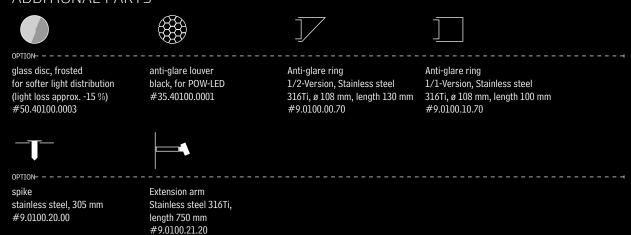

✓ DIMENSIONS



4.0100 SURFACE-MOUNTED SPOTLIGHT





ELECTRO POLISHED POW-LED INCL.































MONOCHROME ILLUMINATION

DYNAMIC ILLUMINATION





5.0635.65.10 max 1

5.0635.65.20 max 3

CONNECT



#	4.0100.30.11
COLOR	6000K cold white
LED	4 POW-LED
LUMEN	2300 lm
WATT	total 18 W
POWER	CC 1200mA @12 V-DC
BEAM	30° medium
CABLE	UW, 2x1,5 qmm
CONNECT	5.0630.10.04 max 1 5.0630.00.04 max 1



#	4.0100.00.41
COLOR	RGB-CW cold white 6000K
LED	4 Multichip POW-LED
LUMEN	cold white: 350 lm
WATT	all on 10 W
POWER	CC 200mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0620.19.52 max 1 (12V-DC) or 3 (SELV)



#	4.0100.30.41
COLOR	RGB-CW cold white 6000K
LED	4 Multichip POW-LED
LUMEN	cold white: 580 lm
WATT	all on 17 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 1 (12V-DC) or 3 (SELV)

#	4.0100.00.12
COLOR	3000K warm white
LED	4 POW-LED
LUMEN	650 lm
WATT	total 4,4 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 2x1,5 qmm
CONNECT	5.0635.65.10 max 1 5.0635.65.20 max 3

COLOR 3000K warm white LED 4 POW-LED LUMEN 1880 lm WATT total 18 W	#	4.0100.30.12
LUMEN 1880 Im WATT total 18 W	COLOR	3000K warm white
WATT total 18 W	LED	4 POW-LED
	LUMEN	1880 lm
BOULES 00 1000 1 010 U BO	WATT	total 18 W
POWER CC 1200mA @12 V-DC	POWER	CC 1200mA @12 V-DC
BEAM 30° medium	BEAM	30° medium
CABLE UW, 2x1,5 qmm	CABLE	UW, 2x1,5 qmm
CONNECT 5.0630.10.04 max 1 5.0630.00.04 max 1	CONNECT	

#	4.0100.00.42
COLOR	RGB-WW warm white 3000K
LED	4 Multichip POW-LED
LUMEN	warm white: 300 lm
WATT	all on 10 W
POWER	CC 200mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0620.19.52 max 1 (12V-DC) or 3 (SELV)

# 4.0100.30.42 COLOR RGB-WW warm white 3000K LED 4 Multichip POW-LED LUMEN warm white: 500 lm WATT all on 17 W POWER CC 350mA @12 V-DC BEAM 30° medium CABLE UW, 8x0,25 qmm CONNECT 5.0635.19.52 max 1 (12V-DC) or 3 (SELV)			
LED 4 Multichip POW-LED LUMEN warm white: 500 lm WATT all on 17 W POWER CC 350mA @12 V-DC BEAM 30° medium CABLE UW, 8x0,25 qmm CONNECT 5.0635.19.52 max 1 (12V-DC)		#	4.0100.30.42
LUMEN warm white: 500 lm WATT all on 17 W POWER CC 350mA @12 V-DC BEAM 30° medium CABLE UW, 8x0,25 qmm CONNECT 5.0635.19.52 max 1 (12V-DC)		COLOR	RGB-WW warm white 3000K
WATT all on 17 W POWER CC 350mA @12 V-DC BEAM 30° medium CABLE UW, 8x0,25 qmm CONNECT 5.0635.19.52 max 1 (12V-DC)		LED	4 Multichip POW-LED
POWER CC 350mA @12 V-DC BEAM 30° medium CABLE UW, 8x0,25 qmm CONNECT 5.0635.19.52 max 1 (12V-DC)		LUMEN	warm white: 500 lm
BEAM 30° medium CABLE UW, 8x0,25 qmm CONNECT 5.0635.19.52 max 1 (12V-DC)		WATT	all on 17 W
CABLE UW, 8x0,25 qmm 5.0635.19.52 max 1 (12V-DC)	ı	POWER	CC 350mA @12 V-DC
CONNECT 5.0635.19.52 max 1 (12V-DC)		BEAM	30° medium
CONNECT	ı	CABLE	UW, 8x0,25 qmm
		CONNECT	

#	4.0100.00.13
COLOR	4500K neutral white
LED	4 POW-LED
LUMEN	700 lm
WATT	total 4,4 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 2x1,5 qmm
CONNECT	5.0635.65.10 max 1 5.0635.65.20 max 3

#	4.0100.30.13
COLOR	4500K neutral white
LED	4 POW-LED
LUMEN	2010 lm
WATT	total 18 W
POWER	CC 1200mA @12 V-DC
BEAM	30° medium
CABLE	UW, 2x1,5 qmm
CONNECT	5.0630.10.04 max 1 5.0630.00.04 max 1

#	4.0100	.00.43
COLO	R RGB-NW r	neutral white 4500K
LED	4 Multichi	p POW-LED
LUME	N neutral wl	nite: 330 lm
WATT	all on 10 V	V
POWE	R CC 200mA	@12 V-DC
BEAM	30° mediu	m
CABL	UW, 8x0,2	5 qmm
CONN	ECT 5.0620.19 or 3 (SELV	.52 max 1 (12V-DC)

#	4.0100.30.43
COLOR	RGB-NW neutral white 4500K
LED	4 Multichip POW-LED
LUMEN	neutral white: 540 lm
WATT	all on 17 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 1 (12V-DC) or 3 (SELV)


#	4.0100.30.80
COLOR	3000K-6000K dynamic white
LED	4 Multichip POW-LED
LUMEN	1000-1160 lm
WATT	all on 17 W
POWER	CC 350mA @12 V-DC
BEAM	30° medium
CABLE	UW, 8x0,25 qmm
CONNECT	5.0635.19.52 max 1 (12V-DC) or 3 (SELV)

UNIQUE AND VERSATILEIN FUNCTIONALITY AND APPLICATION.



≈ TYPICAL APPLICATIONS

For illuminating fountains up to a maximum height of 25 metres. The positioning and number of spotlights depends on the type of fountain - the closer the spotlight, the more intensive and accentuating the illumination. The spotlight is also ideally suited for powerful architectural lighting from the water.

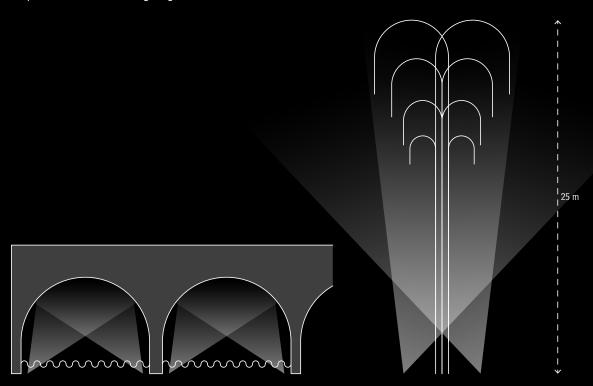

4.0290 SURFACE-MOUNTED SPOTLIGHT

-¦- UP TO 4600 LUMEN LIGHT INTENSITY PERFECT FOR FOUNTAINS AND WATERSIDE ARCHITECTURE

- \equiv
 - · Protection class IP68 up to 3m water depth
 - · Entirely made of stainless steel 316Ti 1.4571
 - · Mounting foot adjustable through 90°

•••

- · POW-LED cold white, warm white, neutral white
- · Multichip POW-LED RGB-W
- · Multichip POW-LED dynamic white
- · operating mode: constant current
- · temperature controlled (onboard)
- · surge protection
- · Rotationally symmetric light distribution

...

- · Cable sleeve, stainless steel 316Ti
- · Constant-current power source/RGB controller external
- · Supplied with lamp and 3 m of underwater cable







4.0290 SURFACE-MOUNTED SPOTLIGHT

[+] CONFIGURATION

LIGHT COLORS




BEAM ANGLES

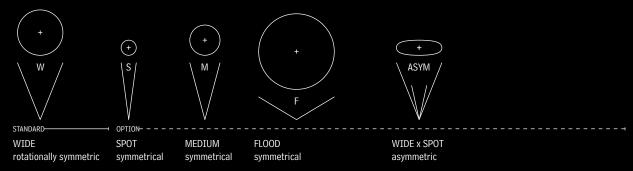

ADDITIONAL PARTS



✓ DIMENSIONS

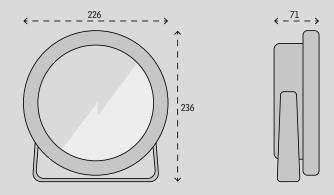

4.0290 SURFACE-MOUNTED SPOTLIGHT





ELECTRO POLISHED































MONOCHROME ILLUMINATION



#	4.0290.00.11
COLOR	6.000K cold white
LED	8 POW-LED
LUMEN	4600 lm
WATT	total 31 W
POWER	CC 2400mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.10.08 max 1

#	4.0290.00.12
COLOR	3.000K warm white
LED	8 POW-LED
LUMEN	3760 lm
WATT	total 31 W
POWER	CC 2400mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.10.08 max 1

#	4.0290.00.13
COLOR	4.500K neutral white
LED	8 POW-LED
LUMEN	4024 lm
WATT	total 31 W
POWER	CC 2400mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.10.08 max 1

DYNAMIC ILLUMINATION



#	4.0290.00.41
COLOR	RGB-CW cold white 6000K
LED	8 Multichip POW-LED
LUMEN	cold white: 1160 lm
WATT	all on 50 W
POWER	CC 700mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 10x0,5 qmm
CONNECT	5.0670.19.52 max 1
BEAM CABLE	50° symmetrisch UW, 10x0,5 qmm

#	4.0290.00.42
COLOR	RGB-WW warm white 3000k
LED	8 Multichip POW-LED
LUMEN	warm white: 1000 lm
WATT	all on 50 W
POWER	CC 700mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 10x0,5 qmm
CONNECT	5.0670.19.52 max 1

#	4.0290.00.43
COLOR	RGB-NW neutral white 4500K
LED	8 Multichip POW-LED
LUMEN	neutral white: 1080 lm
WATT	all on 50 W
POWER	CC 700mA @12 V-DC
BEAM	50° symmetrisch
CABLE	UW, 10x0,5 qmm
CONNECT	5.0670.19.52 max 1


4.0290.00.80
3000K-6000K dynamic white
8 Multichip POW-LED
2000-2320 lm
all on 50 W
CC 700mA @12 V-DC
50° symmetrisch
UW, 10x0,5 qmm
5.0670.19.52 max 1

THIS IS BIG.
LIGHT IN
A POWER
NEVER SEEN
BEFORE.



\lessapprox TYPICAL APPLICATIONS

For illuminating fountains up to a maximum height of 50 metres. The positioning and number of spotlights depends on the type of fountain - the closer the spotlight, the more intensive and accentuating the illumination. The spotlight is also ideally suited for powerful architectural lighting from the water.

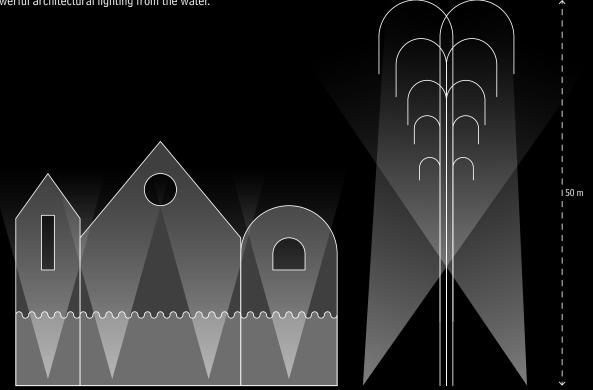

4.0490 SURFACE-MOUNTED SPOTLIGHT


-\'- UP TO 18600 LUMEN LIGHT INTENSITY PERFECT FOR FOUNTAINS AND WATERSIDE ARCHITECTURE




WIBRE


[+] CONFIGURATION

LIGHT COLORS

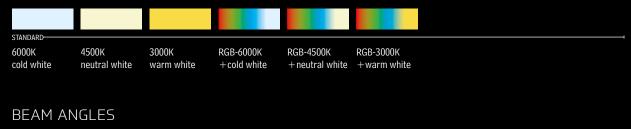

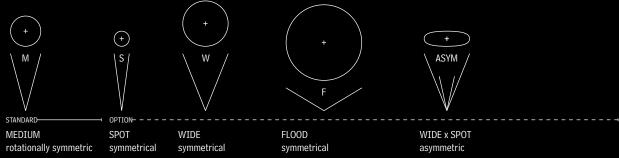


ADDITIONAL PARTS

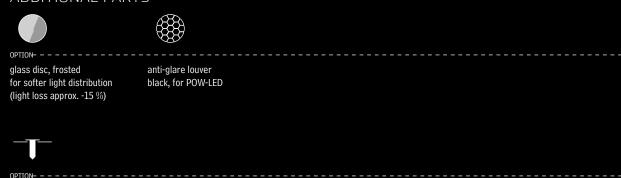

✓ DIMENSIONS

stainless steel, 305 mm

spike

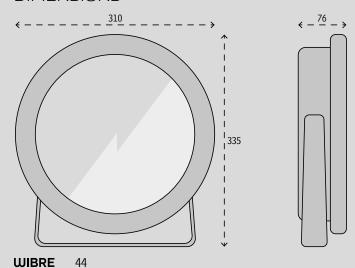

4.0490 SURFACE-MOUNTED SPOTLIGHT





ELECTRO POW-LED INCL.































MONOCHROME ILLUMINATION



#	4.0490.00.11
COLOR	6000K cold white
LED	32 POW-LED
LUMEN	18600 lm
WATT	total 120 W
POWER	CV 12 V-DC
BEAM	30° symmetrisch
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.10.32 max 1

#	4.0490.00.12
COLOR	3000K warm white
LED	32 POW-LED
LUMEN	15040 lm
WATT	total 120 W
POWER	CV 12 V-DC
BEAM	30° symmetrisch
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.10.32 max 1

#	4.0490.00.13
COLOR	4500K neutral white
LED	32 POW-LED
LUMEN	16080 lm
WATT	total 120 W
POWER	CV 12 V-DC
BEAM	30° symmetrisch
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.10.32 max 1

DYNAMIC ILLUMINATION



#	4.0490.00.41
COLOR	RGB-CW cold white 6000K
LED	32 Multichip POW-LED
LUMEN	cold white: 4640 lm
WATT	all on 140 W
POWER	CC 12 V-DC
BEAM	30° symmetrisch
CABLE	UW, 41x0,5 qmm
CONNECT	5.0670.49.52 max 1

#	4.0490.00.42
COLOR	RGB-WW warm white 3000K
LED	32 Multichip POW-LED
LUMEN	warm white: 3760 lm
WATT	all on 140 W
POWER	CC 12 V-DC
BEAM	30° symmetrisch
CABLE	UW, 41x0,5 qmm
CONNECT	5.0670.49.52 max 1

#	4.0490.00.43
COLOR	RGB-NW neutral white 4500K
LED	32 Multichip POW-LED
LUMEN	neutral white: 4020 lm
WATT	all on 140 W
POWER	CC 12 V-DC
BEAM	30° symmetrisch
CABLE	UW, 41x0,5 qmm
CONNECT	5.0670.49.52 max 1

← LIGHT UP YOUR FOUNTAINS AND WATERSIDE ARCHITECTURE

RETROFIT YOUR → OLD SPOTLIGHTS

BESTSELLER REMAINS
BESTSELLER.
WITH QUALITY.
WITH PERFORMANCE.
WITH POW-LED.



≈ TYPICAL APPLICATIONS

This retrofit spotlight is intended as a replacement for existing spotlights with halogen technology, primarily types 4.0267 and 4.0271 and various other makes. This spotlight has everything for a hassle-free change. Better lighting power, considerably less consumption, long service life and safety - standard-conforming operation in water accessible to people is permitted, thanks to the 12 V-DC technology.

IT HAS NEVER BEEN EASIER. A CHANGE IN 5 STEPS

- 1. REMOVE OLD SPOTLIGHT
- 2. CONNECT EXISTING CABLE
- 3. INSERT THE NEW SPOTLIGHT
- 4. SCREW THE SPOTLIGHT TIGHT
- 5. CHANGE THE CONTROL DEVICE


LIGHT ON

4.0291 RETROFIT-SPOTLIGHT

-¦- UP TO 6900 LUMEN LIGHT INTENSITY SUSTAINABLE REPLACEMENT FOR HALOGEN SPOTLIGHTS

- · Protection class IP68 up to 5m water depth
 - · Entirely made of stainless steel 316Ti 1.4571, epolished
 - \cdot Round attachment cover, made of stainless steel 316Ti, height 13 mm

- · POW-LED cold white, warm white, neutral white
- · POW-LED royal blue
- · Multichip POW-LED RGB-W
- · operating mode: constant current
- · temperature controlled (onboard)
- · surge protection
- · light distribution especially for swimming pool lighting "asymmetric Mixflux"

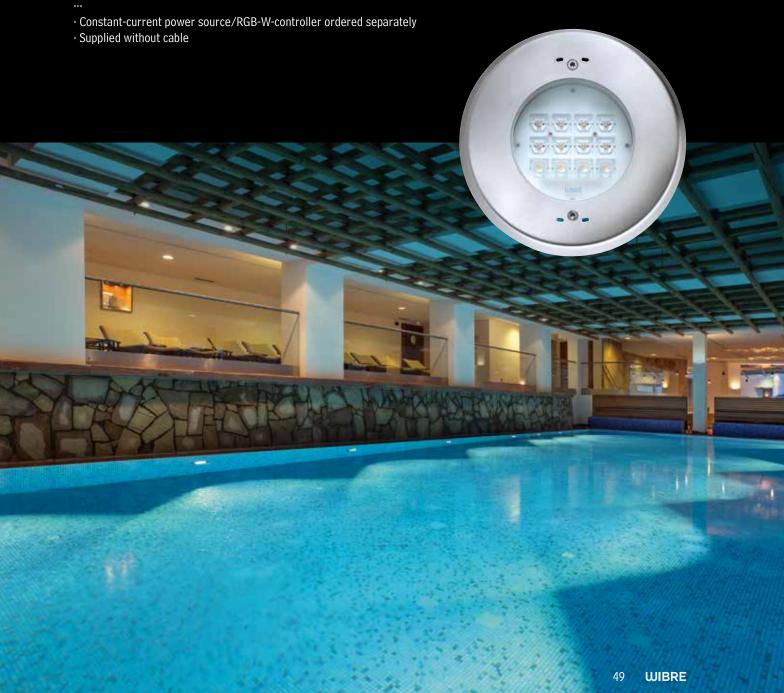


[+] CONFIGURATION

LIGHT COLORS



BEAM ANGLES

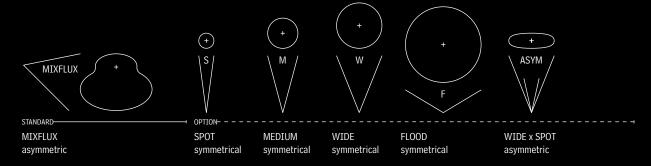


ADDITIONAL PARTS



OPTION- - - -

glass disc, frosted for softer light distribution (light loss approx. -15 %) #50.40292.0004

☑ DIMENSIONS

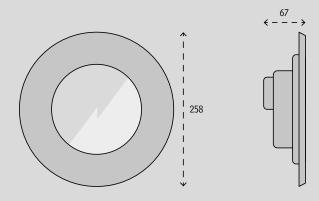

4.0291 RETROFIT-SPOTLIGHT





POW-LED INCL.





























MONOCHROME ILLUMINATION

#	4.0291.00.11
COLOR	6000K cold white
LED	12 POW-LED
LUMEN	6900 lm
WATT	total 47 W
POWER	CC 3600mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.01.12 max 1
	5.0630.03.12 max 3

#	4.0291.00.12
COLOR	3000K warm white
LED	12 POW-LED
LUMEN	5640 lm
WATT	total 47 W
POWER	CC 3600mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.01.12 max 1 5.0630.03.12 max 3

#	4.0291.00.13
COLOR	4500K neutral white
LED	12 POW-LED
LUMEN	6036 lm
WATT	total 47 W
POWER	CC 3600mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.01.12 max 1 5.0630.03.12 max 3

#	4.0291.00.16
COLOR	royal blue (450 nm)
LED	48 POW-LED
LUMEN	500mW/LED
WATT	total 49,5 W
POWER	CC 3600mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 2x2,5 qmm
CONNECT	5.0630.01.12 max 1 5.0630.03.12 max 3

DYNAMIC ILLUMINATION

#	4.0291.00.41
COLOR	RGB-CW cold white 6000K
LED	12 Multichip POW-LED
LUMEN	cold white: 2100 lm
WATT	all on 75 W
POWER	CC 1400mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, $1x4,0 + 4x1,0 + 2x0,25$ qmm
CONNECT	5.0630.09.52 max 1

#	4.0291.00.42
COLOR	RGB-WW warm white 3000K
LED	12 Multichip POW-LED
LUMEN	warm white: 1800 lm
WATT	all on 75 W
POWER	CC 1400mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, $1x4,0 + 4x1,0 + 2x0,25$ qmm
CONNECT	5.0630.09.52 max 1

#	4.0291.00.43
COLOR	RGB-NW neutral white 4500K
LED	12 Multichip POW-LED
LUMEN	neutral white: 1920 lm
WATT	all on 75 W
POWER	CC 1400mA @12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 1x4,0 + 4x1,0 + 2x0,25 qmm
CONNECT	5.0630.09.52 max 1

USE IN SALT WATER

This spotlight is also available as a salt-water version. Spotlights for salty water (with a saltwater concentration of up to 3.5 %) are made of special V4A stainless steel 904L (1.4539).

97 | SAVE 6500 WATTS | PER HOUR.* | IT'S NEVER | BEEN EASIER.



≈ TYPICAL APPLICATIONS

This retrofit insert is intended for existing 4.2000 type spotlights, which are primarily installed in sports pools. The insert has everything for a hassle-free change to LED. Better lighting power, considerably less consumption, long service life, safety and sophisticated temperature management. The latter is important in order to put the spotlight back into operation in accordance with regulations, namely as a closed unit with a cover plate.

IT HAS NEVER BEEN EASIER. A CHANGE IN 5 STEPS

- 1. REMOVE OLD SPOTLIGHT UNIT
- 2. PUSH-IN AND ALIGN THE NEW INSERT
- 3. MOUNT THE COVER PLATE
- 4. CLOSE THE INSPECTION FLAP
- 5. CONNECT TO THE CONTROL DEVICE

LIGHT ON

^{*}Compared to 24 floodlights in a competition pool with 400 Watt each.


4.2013 RETROFIT-INSERTION FOR 4.2000


-\- UP TO 18600 LUMEN LIGHT INTENSITY SUSTAINABLE REPLACEMENT FOR 250/400 W HIT




[+] CONFIGURATION

LIGHT COLORS

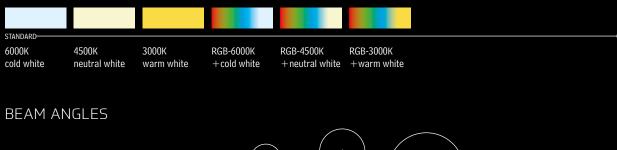

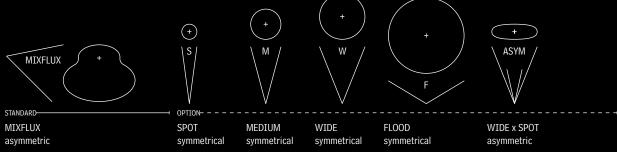

✓ DIMENSIONS

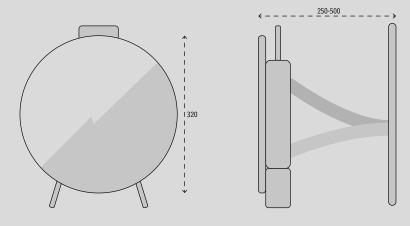

4.2013 RETROFIT-INSERTION FOR 4.2000



POW-LED INCL.




















MONOCHROME ILLUMINATION

#	4.2013.00.11
COLOR	6000K cold white
LED	32 POW-LED
LUMEN	18600 lm
WATT	total 124 W
POWER	CV 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.20.32 max 1

4.2013.00.12
3000K warm white
32 POW-LED
15040 lm
total 124 W
CV 12 V-DC
asymmetrisch Mixflux
UW, 5x1,5 qmm
5.0630.20.32 max 1

#	4.2013.00.13
COLOR	4500K neutral white
LED	32 POW-LED
LUMEN	16080 lm
WATT	total 124 W
POWER	CV 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.20.32 max 1

DYNAMIC ILLUMINATION

#	4.2013.00.41
COLOR	RGB-CW cold white 6000K
LED	32 Multichip POW-LED
LUMEN	cold white: 4640 lm
WATT	all on 152 W
POWER	CC 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 41x0,5 qmm
CONNECT	5.0670.59.52 max 1

#	4.2013.00.42
COLOR	RGB-CW warm white 3000k
LED	32 Multichip POW-LED
LUMEN	warm white: 3760 lm
WATT	all on 152 W
POWER	CC 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 41x0,5 qmm
CONNECT	5.0670.59.52 max 1

#	4.2013.00.43
OLOR	RGB-CW neutral white 4500K
ED	32 Multichip POW-LED
UMEN	neutral white: 4020 lm
VATT	all on 152 W
OWER	CC 12 V-DC
EAM	asymmetrisch Mixflux
ABLE	UW, 41x0,5 qmm
ONNECT	5.0670.59.52 max 1
	OLOR ED UMEN VATT OWER EAM

NEW SHINE
FOR OLDER
SPORTS POOLS.
ENDLESS
ADDED VALUE.



≈ TYPICAL APPLICATIONS

This retrofit insert is intended for existing 4.1900 type spotlights, which are primarily installed in sports pools. The insert has everything for a hassle-free change to LED. Better lighting power, considerably less consumption, long service life, safety and sophisticated temperature management. The latter is important in order to put the spotlight back into operation in accordance with regulations, namely as a closed unit with a cover plate.

IT HAS NEVER BEEN EASIER. A CHANGE IN 5 STEPS

- 1. REMOVE OLD SPOTLIGHT UNIT
- 2. PUSH-IN AND ALIGN THE NEW INSERT
- 3. MOUNT THE COVER PLATE
- 4. CLOSE THE INSPECTION FLAP
- 5. CONNECT TO THE CONTROL DEVICE LIGHT ON

4.1913 RETROFIT-INSERTION FOR 4.1900

-¦- UP TO 9300 LUMEN LIGHT INTENSITY SUSTAINABLE REPLACEMENT FOR 250 W HIT




[+] CONFIGURATION


LIGHT COLORS




BEAM ANGLES

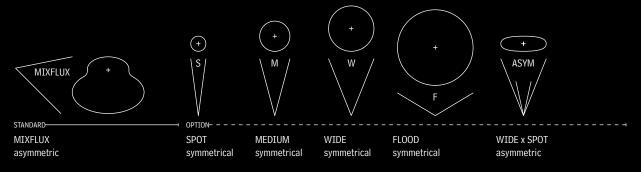

☑ DIMENSIONS





4.1913 RETROFIT-INSERTION FOR 4.1900



POW-LED INCL.



















MONOCHROME ILLUMINATION

#	4.1913.00.11
COLOR	6000K cold white
LED	16 POW-LED
LUMEN	9300 lm
WATT	total 62 W
POWER	CV 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.20.16 max 1

#	4.1913.00.12
COLOR	3000K warm white
LED	16 POW-LED
LUMEN	7520 lm
WATT	total 62 W
POWER	CV 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.20.16 max 1

#	4.1913.00.13
COLOR	4500K neutral white
LED	16 POW-LED
LUMEN	8040 lm
WATT	total 62 W
POWER	CV 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 5x1,5 qmm
CONNECT	5.0630.20.16 max 1

DYNAMIC ILLUMINATION


#	4.1913.00.41
COLOR	RGB-CW cold white 6000K
LED	16 Multichip POW-LED
LUMEN	cold white: 2320 lm
WATT	all on 76 W
POWER	CC 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 25x0,5 qmm
CONNECT	5.0670.39.52 max 1

#	4.1913.00.42
COLOR	RGB-CW warm white 3000k
LED	16 Multichip POW-LED
LUMEN	warm white: 1880 lm
WATT	all on 76 W
POWER	CC 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 25x0,5 qmm
CONNECT	5.0670.39.52 max 1

#	4.1913.00.43
COLOR	RGB-CW neutral white 4500K
LED	16 Multichip POW-LED
LUMEN	neutral white: 2010 lm
WATT	all on 76 W
POWER	CC 12 V-DC
BEAM	asymmetrisch Mixflux
CABLE	UW, 25x0,5 qmm
CONNECT	5.0670.39.52 max 1

← RETROFIT YOUR OLD SPOTLIGHTS

LARC68: HIGHLY RESISTANT ARCHITECTURAL LIGHTING

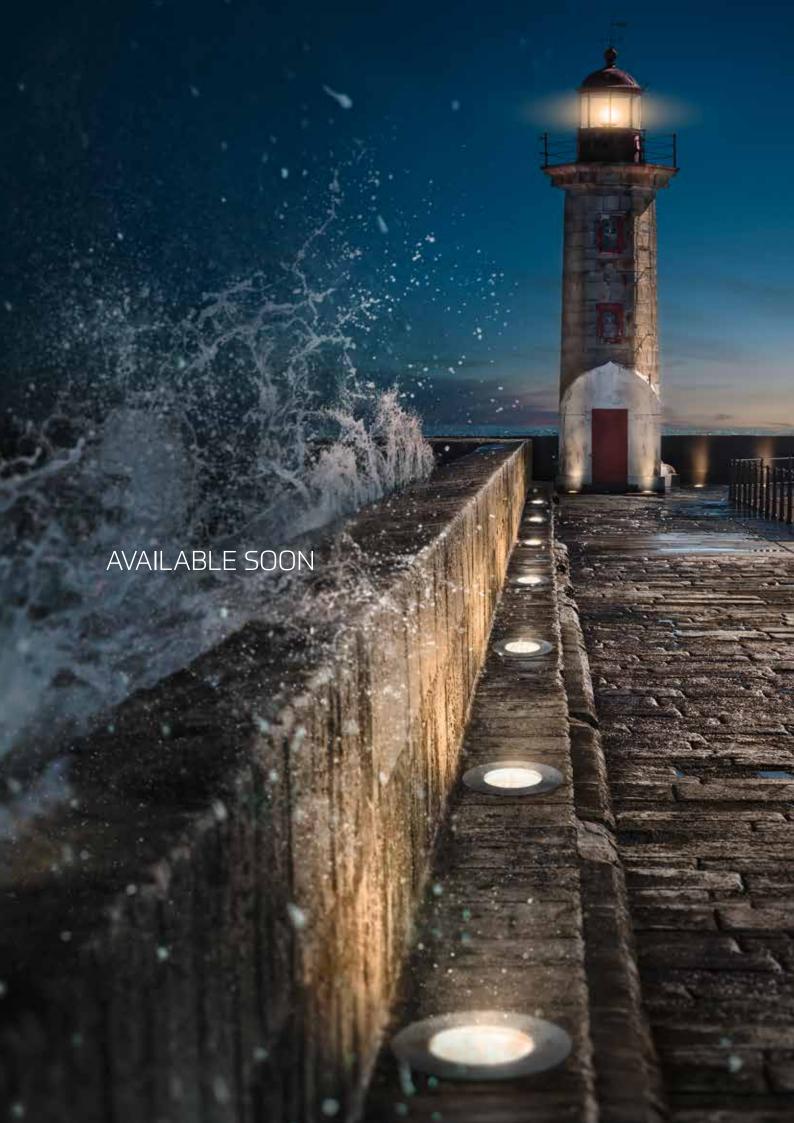





HIGHLY RESISTANT ARCHITECTURAL LIGHTING FOR

ARCHITECTURE
COASTS
HARBOURS
FLOODED AREAS
DIKES

• • •

BY WIBRE

AVAILABLE SOON

L**/RC**68

THE ALL NEW VARIABLE INGROUND SPOTLIGHT

THESE INGROUND SPOTLIGHTS PROVIDES THE SAME HIGH DEGREE OF PROTECTION
AS OUR WORLD FAMOUS UNDERWATER SPOTLIGHTS, ABOVE ALL IP68.
HIGHLY RESISTANT AGAINST WATER AND SALTY AIR. THE SERIE ALSO
IMPRESSES WITH ITS UNSURPASSED FLEXIBILITY.



← LARC68: HIGHLY RESISTANT ARCHITECTURAL LIGHTING


THIS IS WIBRE →

WIBRE

PIONEER, FAMILY-OWNED BUSINESS AND WORLD MARKET LEADER

The name WIBRE stands for the company founder WIlhelm BREuninger. His pioneering work continues into the 4th generation. As a leading international family business, it is our highest claim to offer you first-class and durable quality spotlights. Manufactured in Germany. Developed for the world. Handmade for your project.



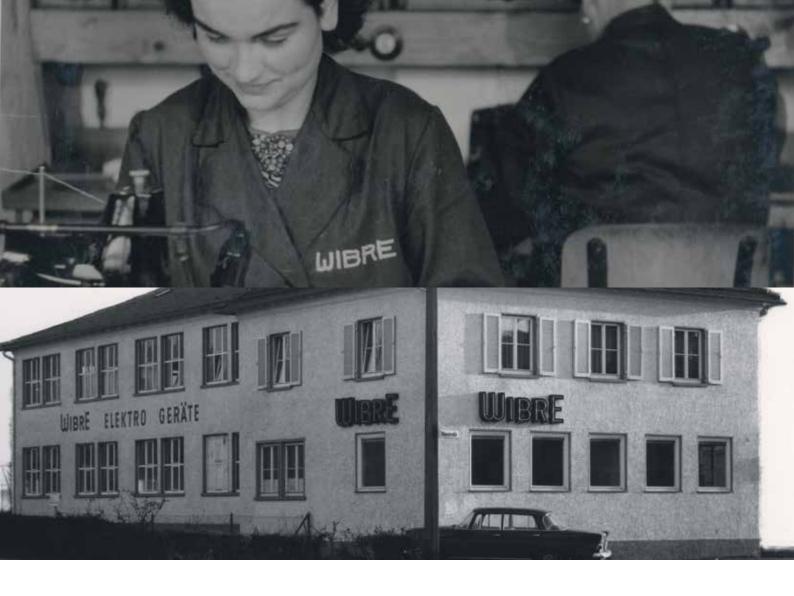


ONE HUNDRED YEARS

A SUCCESS STORY WITH A BRIGHT FUTURE

Only by constantly looking ahead can we write history. Since 1919 we have been developing and producing electrical devices of various kinds and since the 50s we have been producing luminaires for underwater use. 20 years ago we started the development of LED spotlights. Back then and today, ground-breaking.

LIGHT AND WATER ELEMENTS FOR OUR PASSION

Uniting the life elements water and light is what we strive for. We are passionate about developing waterproof light to perfection. The permanent function under water is our claim. Our aim: inspiring you with our light.

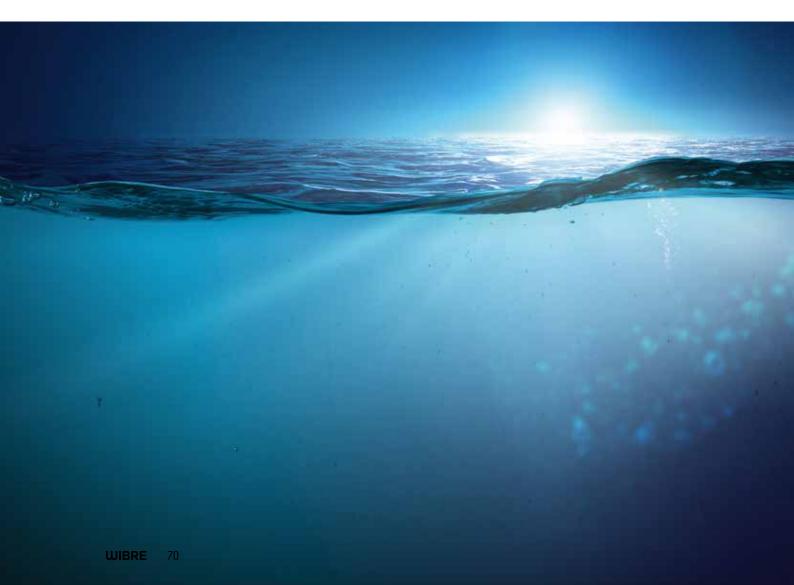



STAINLESS STEEL

THE MATERIAL OUR SPOTLIGHTS ARE MADE OF

The backbone for a long service life is our high-quality and carefully selected stainless steel protecting the inner life of the spotlight from all external influences, in the truest sense of the word. No plastic, no aluminium, no gunmetal.

Our specially treated V4A stainless steel for fresh water (1.4571) and salt water (1.4539) is corrosion-resistant and delivers what we promise: 10 years warranty.

^{*}Guarantee conditions can be found at wibre.de/warranty.

LIGHTING TECHNOLOGY OPTIMUM PERFORMANCE WITH LONG SERVICE LIFE

We aim at lighting each object in an optimal way.

This can only be achieved with powerful light and the right technology. Modular quality LED modules in variable light colours and RGB-W, combined with different optics guarantee customer-specific lighting. Each individual spotlight is adapted to the type of application in terms of luminous intensity and light spreading characteristics.





GUARANTEED DURABILITY OUR PROMISE IN BLACK AND WHITE

No empty words and no fine print.

You receive a 10-year guarantee against rusting through on all installation pots and lamp housing made of stainless steel, as well as 5 years warranty on all spotlights of the CENTUM° series.

^{*}Guarantee conditions can be found at wibre.de/warranty.

CERTIFIED QUALITY CONSIDERED VERY GOOD

As a basis for the CENTUM°° series, we have had tested the spotlight 4.0292 by an independent body.

Without reservation, extraordinarily long service life and quality have been attested. And this applies to all our products.





WITH CERTAINTY SAFE

WITHOUT ANY ROUGH EDGES

No sharp edges, no sharp corners, no dangerous gap.
All spotlights are geared to safety, both in design and electrical terms.
Based on 12 V-DC low voltage, we meet the recommendation of the VDE standard for public bathing areas. For sure.

CONTROLLED QUALITY TRUST IS GOOD, CONTROL IS BETTER

Of course every single spotlight is individually checked from A to Z before it arrives at your premises. A 100 percent quality assurance is our promise to you. Trust us - we control.



Imprint:

Publisher: WIBRE Elektrogeräte Edmund Breuninger GmbH & Co.KG

Liebigstr. 9, 74211 Leingarten/Germany Phone 07131 9053-0, Fax 07131 9053-19 E-Mail: info@wibre.de, Web: www.wibre.de

Edition: W969 Tools 20/21

Photos: WIBRE

Concept, text and design: Benjamin Pfendt (Wibre)

All information is not binding Technical changes reserved

LIGHT UP THE WORLD'S WATER.

1 HEADQUARTER1 MANUFACTURING SITE37 DISTRIBUTION PARTNERS53 COUNTRIES



CONTACT

CHOOSE THE PARTNER FOR YOUR COUNTRY:



WIBRE

PIONEERS IN IP68-LIGHTING