

| | | |
|---------------------------|---------------------------------------|---|
| 44424008 | DATA SHEET |  |
| Valid from: 17.09.2018 | EPIC® MC MODUL PNEUMATIC 2pole | |

Description

- The mixed assembly guarantees high flexibility. For applications in mechanical and plant engineering, for printing machines and slide-in technology.
- Assembly of individual connectors, suitable for different applications



General Characteristics

| Article- number | Article | Version | Contacts | Max. pressure |
|--------------------------------|---------------------|-------------------|----------|---------------|
| Module: Pneumatic 1pole | | | | |
| 44424008 | MCS 2x2,5 PNEU (10) | Male | 2 | 10 |
| 44424009 | MCB 2x2,5 PNEU (10) | Female with valve | 2 | 10 |
| 44424010 | MCS 2x4,0 PNEU (10) | Male | 2 | 10 |
| 44424011 | MCB 2x4,0 PNEU (10) | Female with valve | 2 | 10 |

Termination Methods

Temperature Range

Plug-in connection:

for hose with inner diameter Ø 2.5 mm/4.0mm

-20°C to +100°C

Mechanical Characteristics

Cycle of mechanical operation

100

Materials and Surfaces

Contact

Brass



| | | |
|---|---------------------------------------|-------------|
| Creator: MANA2/PDP Released: IVSE1/PDP | Document: DB44424008EN Version: 01 | Page 1 of 2 |
|---|---------------------------------------|-------------|

We reserve all rights according to DIN ISO 16016.

PD 0019/05_04.18EN

| | | |
|---------------------------|---------------------------------------|---|
| 44424008 | DATA SHEET |  |
| Valid from: 17.09.2018 | EPIC® MC MODUL PNEUMATIC 2pole | |

Technical Drawing

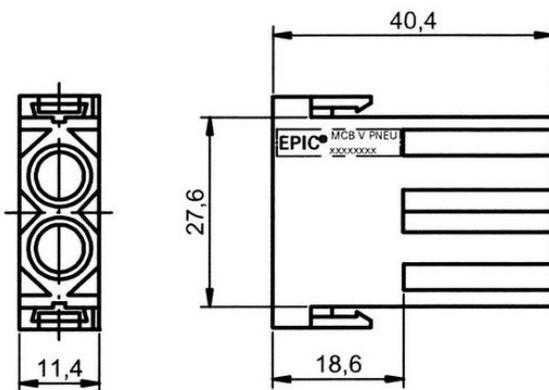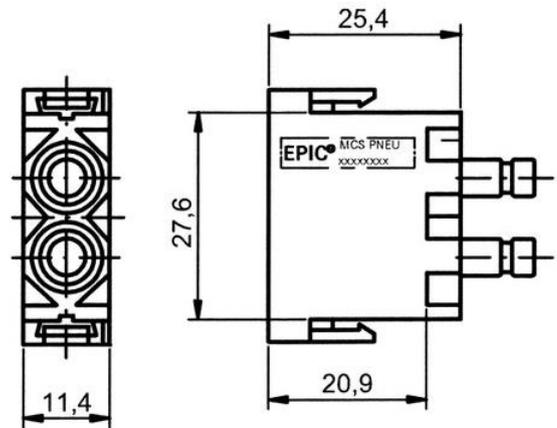

Automation



Industrial machinery and plant engineering



Wind Energy

Info

Pneumatic modules with valve for 2.5 and 4mm tubings

Application range

Plant engineering
Printing machines
Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

| | | |
|---|---------------------------------------|-------------|
| Creator: MANA2/PDP Released: IVSE1/PDP | Document: DB44424008EN Version: 01 | Page 2 of 2 |
|---|---------------------------------------|-------------|