


### Description

- RJ45 connector for use in module MCS 8 RJ45
- For data transmission rates up to 100Mhz
- The mixed assembly guarantees high flexibility



### Pin assignment


EIA/TIA 586A



(1)---- : pair

- 1..... white /green
- 2..... green/ white
- 3..... white/ orange
- 4..... blue/white
- 5..... white/ blue
- 6..... orange/ white
- 7..... white/brown
- 8..... brown/ white

EIA/TIA 568B




(1)---- : pair


- 1..... white/ orange
- 2..... orange/ white
- 3..... white/green
- 4..... blue/white
- 5..... white/ blue
- 6..... green/ white
- 7..... white/brown
- 8..... brown/ white

### Instruction

- 1) Remove cable jacket

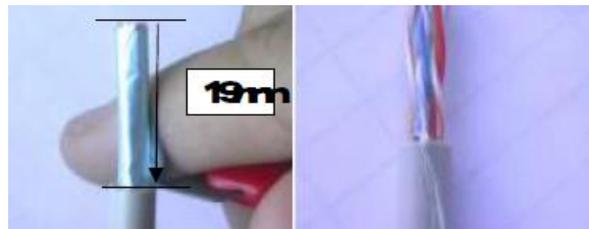


- 2) Arrange the wires



- 3) After arrangement, cut 2 to 5mm away




- 4) Assemble plug

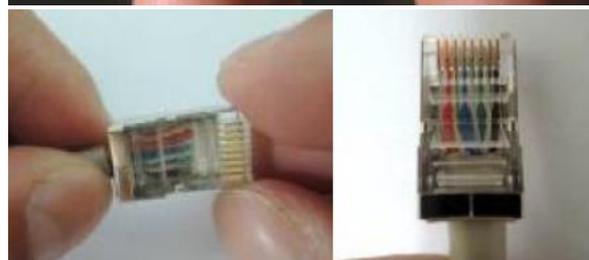

CE6326	<b>INSTALLATION GUIDE</b>	
Valid from: 03.12.2019	<b>EPIC CE6326 RJ45 Connector for MCS 8 RJ45</b>	

- 5) Crimping plug  
Remark: according to FCC standard  
H=5.98 to 6.08mm



- 6) Molding



Creator: FELI1/PDP Released: IVSE1/PDP	Document: BZCE6326EN Version: 01	Page 2 of 2
---	-------------------------------------	-------------